


Specification:

- 1). Driving: Duty: 1/16, Bias:1/5, VDD:5.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode: STN/Yellow-Green/Positive/Transflective
- 4). Operating temp.: -10°C~+60°C
Storage temp.: -20°C~+70°C
- 5). IC: S6A0069 or equivalence
- 6). Backlight: LED, Yellow

| PIN | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
|------------|-----|-----|----|----|-----|---|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| CONNECTION | VSS | VDD | V0 | RS | R/W | E | DB0 | DB1 | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | A | K |

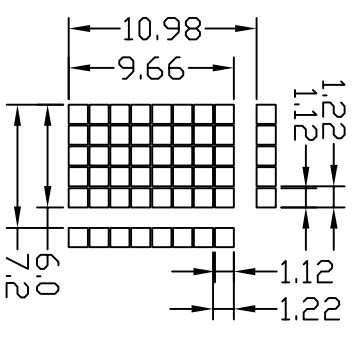

HOT DISPLAY

Dwg Title: HTM2002B

Dwg No. _____ Date: 2009-04-07

Scale: _____ Unit: mm Tol: ±0.2

Drawn: DJU Checked: _____ Approved: _____